


# MARS™ CLIMAPLUS™

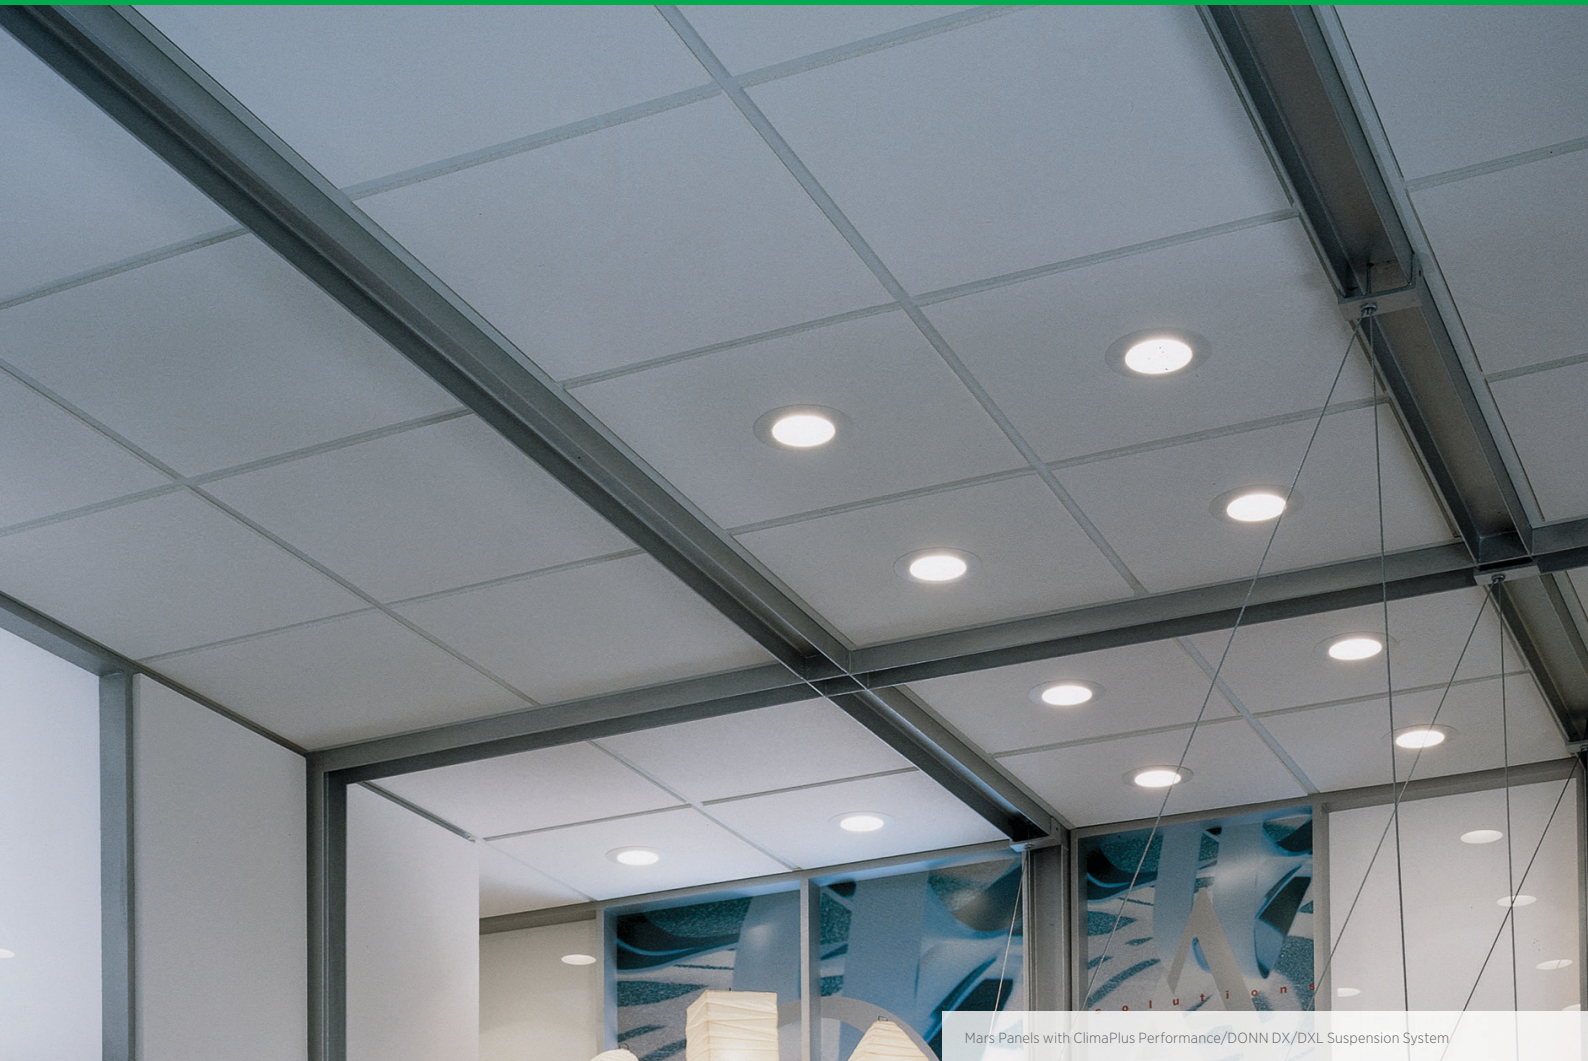

Mars Panels with ClimaPlus Performance/DONN DX/DXL Suspension System

## FEATURES AND BENEFITS

- Excellent noise reduction (NRC .70)
- High light-reflective finish (LR-.90) reduces light fixtures and energy use
- Washable and scrubbable finish - impact and scratch resistant
- Available in Optimized Recycled Content formulations to help maximize LEED recycled content contribution
- Coordinates visually with Halcyon™ for open/closed plan applications
- Non-directional, monolithic visual reduces installation time and waste
- ClimaPlus™ 30-year lifetime system warranty against visible sag.

## APPLICATIONS


- Offices
- Conference rooms
- Healthcare
- Classrooms
- Corridors
- Reception/Lobby areas
- Dining rooms, kitchens and food prep areas

## SUBSTRATE

- Wet-formed mineral fiber

 High Recycled Content

Medium-textured panel

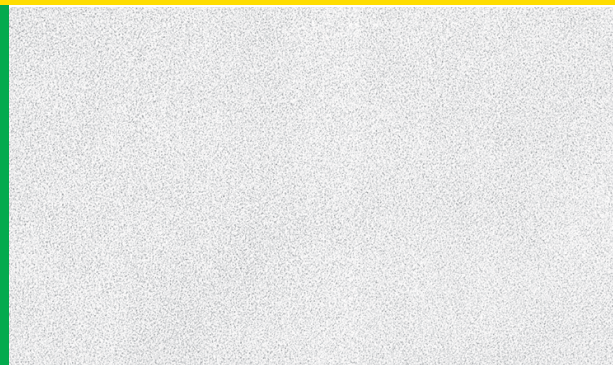

MARS CLIMAPLUS PANELS

Edge	Panel Size <sup>3</sup>	Class	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content <sup>1</sup>				
											Total	PC	PI	LEED RC	
SQ	2' x 2' x 3/4"	Class A	86185	.70	35	.90	White	A, B, C	Low		75.1%	0.0%	75.1%	37.6%	
	2' x 2' x 3/4"	Class A	86185HRC	.70	35	.90	White	A, B, C	Low		80.5%	17.7%	63.8%	49.1%	
	2' x 4' x 3/4"	Class A	88185	.70	35	.90	White	A, B	Low		75.1%	0.0%	75.1%	37.6%	
	2' x 4' x 3/4"	Class A	88185HRC	.70	35	.90	White	A, B	Low		80.5%	17.7%	63.8%	49.1%	
SLT	2' x 2' x 3/4"	Class A	86785	.70	35	.90	White	D	Low		75.1%	0.0%	75.1%	37.6%	
	2' x 2' x 3/4"	Class A	86785HRC	.70	35	.90	White	D	Low		80.5%	17.7%	63.8%	49.1%	
	2' x 4' x 3/4"	Class A	88785	.70	35	.90	White	D	Low		75.1%	0.0%	75.1%	37.6%	
	2' x 4' x 3/4"	Class A	88785HRC	.70	35	.90	White	D	Low		80.5%	17.7%	63.8%	49.1%	
FLB	2' x 2' x 3/4"	Class A	86985	.70	35	.90	White	E, F, G, H	Low		75.1%	0.0%	75.1%	37.6%	
	2' x 2' x 3/4"	Class A	86985HRC	.70	35	.90	White	E, F, G, H	Low		80.5%	17.7%	63.8%	49.1%	
	2' x 4' x 3/4"	Class A	88985	.70	35	.90	White	E, F, G, H	Low		75.1%	0.0%	75.1%	37.6%	
	2' x 4' x 3/4"	Class A	88985HRC	.70	35	.90	White	E, F, G, H	Low		80.5%	17.7%	63.8%	49.1%	
	30" x 30" x 3/4"	Class A	86830	.70	35	.90	White	E, F, G, H	Low		75.1%	0.0%	75.1%	37.6%	

LEGEND

**Low Emission (VOC Class)**  
 Low-Emitting performance meets CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on CHPS data base for low-emitting materials. USG Certificate of Compliance for Low VOC Emissions also available in usg.com

**CLIMAPLUS Superior Performance<sup>4</sup>**  
 Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew.

**High Recycled Content**  
 Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

**NRC ≥ .70 NRC**  
**LR ≥ .85 LR**

GRID PROFILE OPTIONS

A DX®/DXL™ DXI DXII DXIII	B DXW™	C <sup>5</sup> Centricitee™ DXT™	D DX®/DXL™ DXI DXII DXIII	E Centricitee™ DXT™	F Fineline® 1/8"™ DXF™	G Fineline® 1/8"™ DXFF™	H Omega™ DXM™

PHYSICAL DATA/ FOOTNOTES

**ASTM E1264 Classification**  
 Type IV, Form 1 and 2, Pattern E, G

**ASTM E84 surface burning characteristics**  
 Class A  
 Flame spread: 25  
 Smoke developed: 50

**Imperial Weight**  
 1.06 lb./ft.<sup>2</sup>

**Metric Weight**  
 5.17 kg/m<sup>2</sup>

**Thermal Resistance**  
 R-2.2

**Backloading**  
 Refer to Ceiling Systems Limited Warranty Commercial Applications (SC2102).

**Maintenance**  
 Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface

**Footnotes**

- For details, see LEED report tool at usgdesignstudio.com.
- LR values are shown as averages.
- Not all panel sizes available in all geographic areas, some metric sizes available to order.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold and mildew. For details, see Ceiling Systems Limited Warranty Commercial Applications (SC2102).
- Maximum 2'x2' with SQ edge panels.

**Short Specification:**

- Ceiling system shall comprise USG Mars™ ClimaPlus™ high humidity / fire resistant acoustical ceiling panels in (DONN Centricitee 15mm [9/16"] / DONN DX 24mm [15/16"] / DONN Omega 15mm [9/16"] / DONN Fineline 15mm [9/16"] / DONN Identitee 15mm [9/16"]) exposed grid including wall trim as manufactured by USG Interiors, LLC.
- Panels shall have NRC 0.70.
- Panels shall have CAC 35.
- Nominal size (600mm x 600mm / 600mm x 1200mm) x 19mm / (2' x 2' / 2' x 4') x 3/4".
- Edge detail shall be (Fineline Bevel [FLB] / Shadowline Tapered [SLT] / Square edge [SQ]).
- Limiting Conditions - Maximum 40°C (104°F)/95% RH.

**TRADEMARKS**  
 The trademarks CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXL, DXM, OMEGA, DXT, DXW, DXI, FINELINE, IDENTITEE, MARS and INNOVATION INSPIRED BY YOU are trademarks of USG Boral Building Products or one of more of its affiliates.

**SAFETY FIRST!**  
 Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

ACT 11 2015 / 7-15  
 ©2016 USG Boral. All rights reserved.

Manufactured, sold or distributed by USG Boral Building Products or one of more of its affiliates.  
 Persiaran Lagoon, Bandar Sunway, Petaling Jaya, Selangor, Malaysia 46150

**USG BORAL SINGAPORE**  
 8 Boon Lay Way #02-06 TradeHub 21  
 Singapore 609964  
 Tel: (65) 6272 9272 Fax: (65) 6278 5310



www.usgboral.com

